




ACT
CHINA
晶莹化工

OvenSaver™ 1220

烘房粘尘片

Product: OvenSaver™ 1220 Tacky Oven Foil is used in paintshop ovens and heated flash zones to capture airborne contaminants and reduce paint defects. This product is fire retardant and antistatic, so that it can be safely used on floors, walls, and decking over a broad temperature range. It provides a cost-effective solution to maintaining paint quality in a difficult-to-maintain area of the paint shop.

产品: OvenSaver™ 1220 烘房粘尘片维护烘干炉和其他高温区的清洁，吸附粉尘颗粒等杂质。该产品阻燃、防静电，安全用于温度变化大的地面、墙面等。它提供了经济有效的方法，保护最难维护的高温区域，提高喷涂质量。

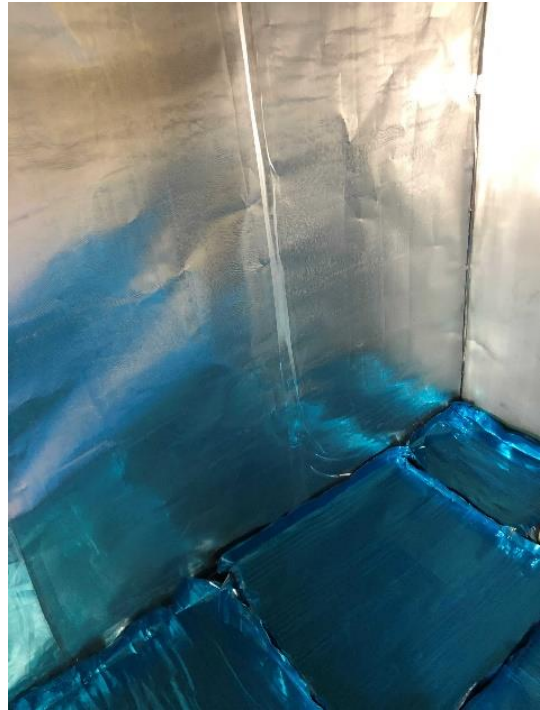

上海市铜仁路 258 号银座 5D 室 / 北京市海淀区中关村北大街 123 号华腾科技大厦 2406 室

上海: 电话: +86 (21) 5266-2232 传真: +86 (21) 5266-2231 / 北京: 电话: +86 (10) 8261-4865 传真: +86 (10) 6263-5472



ACT
CHINA
晶莹化工

OvenSaver™ 1220

烘房粘尘片

Benefits: Captures dirt seeds to reduce paint defects. 吸附粉尘、减少喷涂瑕疵。
优点: Use on walls, floors and conveyor areas. 可用于墙面、地面、传送带下区域
Fire retardant and antistatic. 阻燃、防静电无
Effective for weeks at 180C. 180C 高温下的有效期能达数周
Environmentally friendly. No VOC and no solvents. 对环境无害，无 VOC 无溶剂
Solid non-toxic waste disposal. 无毒固体废弃物处理

Usage: -Mount on walls, floors and decking with clips/magnet. 放置到烘干炉的墙面、地面等。
用法: -Peel away protective release film to expose the tacky coating. 剥离外层保护膜以便敞
露预涂粘性表面。
-After 2 to 4 weeks, remove and replace with fresh foil. 2-4 周后,更换新产品。

Part #: M16220 0.8 x 3.0m ; 4 panels/ctn. 每片 0.8 x 3.0m, 4 片/箱