




ACT
CHINA
晶莹化工

BoothSaver™ 2098

防静电粘性网

Product: BoothSaver™ 2098 Antistatic Tacky Mesh Curtain is used in paint shop walls, walkways and tunnels to capture and hold dirt seed contaminants before they can affect paint quality. It is a specialized fire-retardant & anti-static mesh that is coated with a high tack residue-free adhesive on both sides. The mesh does not restrict air flow or produce tunneling effects that might otherwise adversely affect booth balance.

产品: BoothSaver™ 2098 防静电粘性网用于悬挂在油漆车间过道或墙边，吸附粉尘预防污染。该产品阻燃防静电，双面涂布高粘度无残留胶水。塑料网不阻挡气流，也不会改变气流走向，不影响车间预先设计的通风。

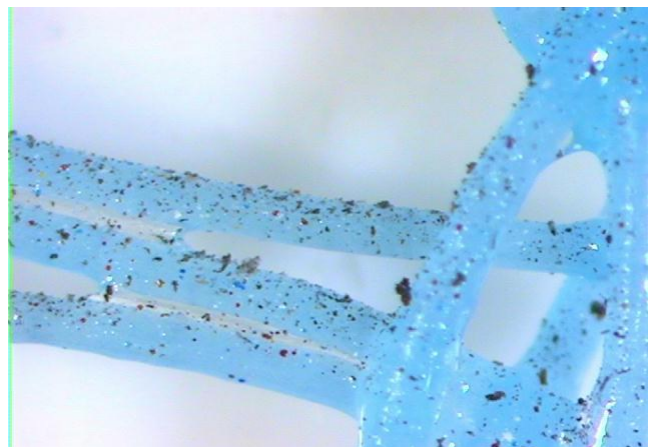

Benefits: Hi tack coating on fiber free polyolefin mesh netting.

上海市铜仁路 258 号银座 5D 室 / 北京市海淀区中关村北大街 123 号华腾科技大厦 2406 室
上海: 电话: +86 (21) 5266-2232 传真: +86 (21) 5266-2231 / 北京: 电话: +86 (10) 8261-4865 传真: +86 (10) 6263-5472

Rev: April 3, 2020

www.actinasia.com

Page 1 of 2



ACT
CHINA
晶莹化工

BoothSaver™ 2098

防静电粘性网

Hang in from ceilings to form “filter curtains” that trap contaminants yet allow free air flow. Use as netting in blow-off zones and booth entrance silhouettes to capture dirt seed contaminants before they become paint defects.

Fire retardant & antistatic for safe use in industrial workshops.

Can be used on glass, walls, floors and doorways as well.

Maintains good visibility.

Temperature resistant to 100C.

Solid non-hazardous, PVC-free disposal.

优点:

无纤维的塑料网上高粘度的涂布

从屋顶挂下，形成滤网，吸附空中污染源，同时不影响气流

悬挂于流平区及车间入口处阻挡灰尘

阻燃、防静电，对涂装安全

也可用于玻璃上、墙面、地面、门口

可视性良好

可耐温至 100C

固体无害废弃物，不含 PVC

Usage:

- BoothSaver™ 2098 Antistatic Tacky Mesh is available in 1.2 x 50m rolls. Prepare the film by first peeling away the release backing film.

- Hang the mesh with magnets, staples, hooks or other fastening device. Overhead cabling can be used to form inexpensive “frames” for suspension with binder clips then used to quickly attach the tacky mesh to the wire. Where possible, leave 1” between mesh and walls.

- To hold mesh taut, use a plastic box filled with water as a weight for the bottom edge.

使用:

- BoothSaver™ 2098 防静电粘性网每卷 1.22 米宽，50 米长。使用前先把隔离膜撕去。

- 将黏性网用磁铁、钉或钩子挂牢。可以高处拉线做成简易框架，用夹子把网固定在线上。可能的情况下，至少让黏性网离墙面一英寸。

- 为了让黏性网垂直，可以用盛水的塑料盒压重。

Packaging:

M17024-48-50 Light Blue 浅蓝色, 1.22m x 50m

包装: