



ACT
CHINA
晶莹化工

BoothSaver™ 2029


鞋套薄膜

Product: BoothSaver™ 2029 Boot Saver Film provides a quick, cost-efficient method for controlling dirt seed contamination and paint-tracking in the paint booth. This adhesive film covers work boots upon entering the cleanroom areas, thereby encapsulating any dirt seeds and preventing their migration into the paint shop. It can also be used to temporarily protect the workers boots when exiting the booth, to eliminate paint tracking. Perforations eliminate the need for knives or scissors. These covers are fiber-free and paintshop safe.

产品: BoothSaver™ 2029 鞋套薄膜能有效防止工作鞋带入污染，使用快速、便捷。此产品可黏附在工作鞋上进入车间区域，包裹鞋上的污染物防止其进入喷房。也可在进入喷房时临时性的包裹工作鞋，防止油漆带出。撕拉线的设计去除了刀具的使用。该产品无纤维、可安全用于喷房。



Paint Overspray and Paint Tracking Damage 油漆过喷和油漆足迹污染

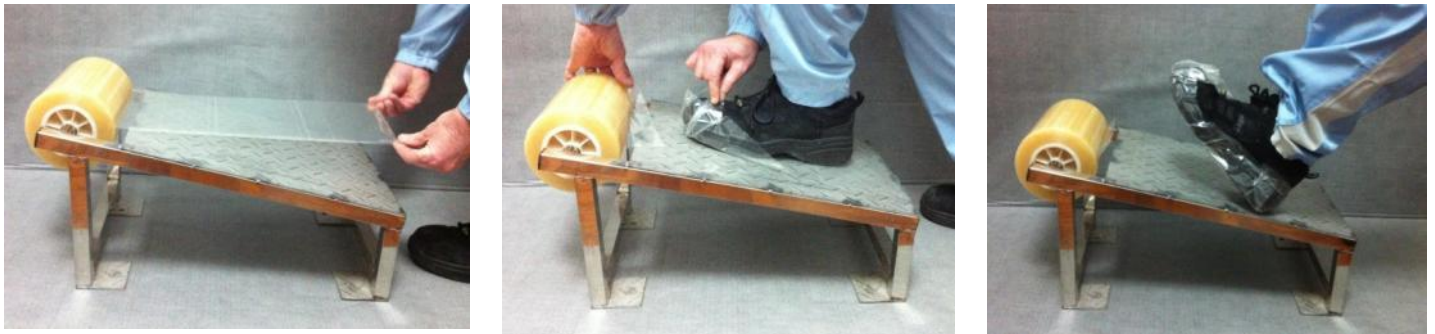

BoothSaver™ 2029 Application 鞋套薄膜使用过程

Benefits: Fiber-free.
Secure fit, will not fall off.
Disposable, one size fits all simplicity.
Perforated for easy tearing.
Protects boots, and reduces paint tracking.
Prevents dirt contamination from entering paint area.

优点: 不含纤维。
包裹紧密，不至滑脱。
用完丢弃，单一尺码极其方便。
自带撕拉线，方便按需取用。
保护鞋靴，减少油漆足印带出。
防止污染源进入洁净区



ACT
CHINA
晶莹化工

BoothSaver™ 2029 鞋套薄膜

Usage: Load applicator (available from ACT China) with a roll of BoothSaver™ 2029 film.
使用: Place at cleanroom and paint booth entry areas. Unroll a layer of film and place flat on incline surface. Place boot on to center of panel and tear at perforation ahead of the boot's toe. The adhesive edge can be lifted and re-applied to improve fit. Apply additional layer if leaving paint booth temporarily. Or remove completely and reverse wrap into a ball before disposing.
在洁净区域, 取一卷 BoothSaver™ 2029 鞋套薄膜放置于取用架上 (晶莹化工可提供) 或类似工具上. 拉开塑料膜平展于板面. 穿着工作鞋踩上板面, 按撕拉线撕开薄膜. 薄膜边缘包裹鞋子. 污染后可再贴一层. 取下后将其反转揉团后丢弃.

Packaging: M17029-20-100 0.20m x 100m (200+ wraps/roll 约可包裹 200 次以上)